


SWINGSTAGE



100 years of reaching
new heights

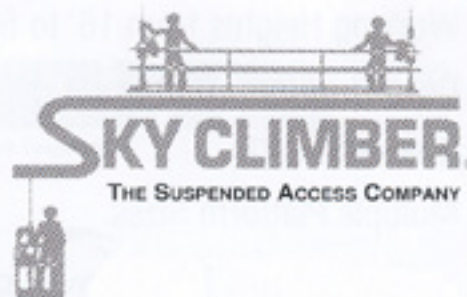

- Skyclimber Electric and Air Motors
- Modular Platforms to 45'
- Bedladders from 8' to 39'
- Roof Hooks
- Parapet Clamps
- Outrigger Beam Systems
- Bosun's Chairs
- Safety Equipment
- Design / Engineering / Installation



Length	Dimensions	Weight	Capacity
8'	28"x 8'x 4'	48 lbs.	750 lbs.
12'	28"x 12'x 4'	71 lbs.	750 lbs.
16'	28"x 16'x 5'	103 lbs.	750 lbs.
20'	28"x 20'x 5'	128 lbs.	750 lbs.
24'	28"x 24'x 6'	161 lbs.	750 lbs.
28'	28"x 28'x 6'	223 lbs.	750 lbs.
32'	28"x 32'x 6'	254 lbs.	750 lbs.
36'	28"x 36'x 6'	348 lbs.	750 lbs.
39'	28"x 39'x 6'	388 lbs.	750 lbs.

Length	Configuration	Weight	Capacity
5'	5	161 lbs.	1000 lbs.
10'	10	241 lbs.	1000 lbs.
15'	10 5	335 lbs.	1000 lbs.
20'	10 10	397 lbs.	1000 lbs.
25'	10 5 10	491 lbs.	1000 lbs.
30'	10 10 10	553 lbs.	1000 lbs.
35'	10 10 10 5	647 lbs.	750 lbs.
40'	5 10 10 10 5	741 lbs.	750 lbs.
45'	2.5 5 10 10 10 5 2.5	937 lbs.	750 lbs.

4' extension sections also available

Model	Power	Voltage / Air	Ascent Speed	Descent Speed	Capacity
Alpha 1000	Electric	Dual 110V/220V or Single 220V	32'/min.	35'/min.	1000 lbs.
	Air	70 CFM, 100 PSI	35'/min.	35'/min.	1000 lbs.
Compact 750	Electric	Dual 110V/220V or Single 220V	32'/min.	35'/min.	750 lbs.
	Air	70 CFM, 100 PSI	35'/min.	35'/min.	750 lbs.
Model 4	Electric	Dual 110V or 220V	20.5'/min.	20.5'/min.	750 lbs.
			15.5'/min.	15.5'/min.	1000 lbs.
	Air	70 CFM, 100 PSI	30'/min.	30'/min.	750 lbs.
			20'/min.	20'/min.	1000 lbs.
CX1250	Air	70 CFM, 100 PSI	33'/min.	35'/min.	1250 lbs.
Alpha 1500	Electric	220V	30'/min.	30'/min.	1500 lbs.
	Air	70 CFM, 100 PSI	24'/min.	29'/min.	1500 lbs.